


RUBBER COATED NEODYMIUM MAGNET WITH INTERNAL THREAD, ROUND BASE

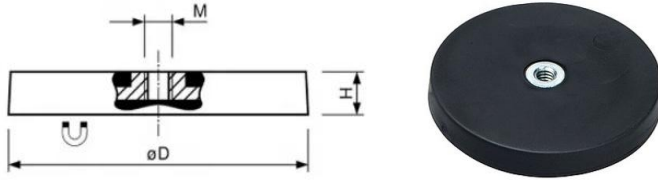

No.	model code	description of parts	D	H	M	pull force	magnet type	coating
		mm	mm	mm	thread	Kgs		
1	NP02-22	rubber coated magnets with in	22	6	M4	4.5	NdFeB	rubber
2	NP02-31	rubber coated magnets with in	31	7	M5	8.5	NdFeB	rubber
3	NP02-31A	rubber coated magnets with in	31	6	M5	8	NdFeB	rubber
4	NP02-36	rubber coated magnets with in	36	7	M4	15	NdFeB	rubber
5	NP02-43	rubber coated magnets with in	43	6	M4	8.5	NdFeB	rubber
6	NP02-66	rubber coated magnets with in	66	8	M4	18	NdFeB	rubber
7	NP02-66A	rubber coated magnets with in	66	8	1/4-20	18	NdFeB	rubber
8	NP02-66B	rubber coated magnets with in	66	8.5	M6	18	NdFeB	rubber
9	NP02-66C	rubber coated magnets with in	66	8	M6	18	NdFeB	rubber
10	NP02-66D	rubber coated magnets with in	66	8	M4	18	NdFeB	rubber
11	NP02-88	rubber coated magnets with in	88	8.2	M8	42	NdFeB	rubber
12	NP02-88A	rubber coated magnets with in	88	8.2	M6	42	NdFeB	rubber
13	NP02-88B	rubber coated magnets with in	88	8.5	M6	42	NdFeB	rubber
14	NP02-89.3	rubber coated magnets with in	89.3	8.5	M6	42	NdFeB	rubber
15	NP02-89.3A	rubber coated magnets with in	89.3	8.5	M5	42	NdFeB	rubber

The rubber-coated mounting magnets with internal (female) threaded stem/bushing offer magnetic bases for waterproof magnetic ceiling hooks and rustproof holding magnets for outdoor use. All the internal thread rubber-coated mounting magnets are made with neodymium material, which produces the strongest strength.

There are still many other variables in terms of the size, thread types, thread height, surface treatment, pull force requirements etc. If you didn't find the parts will accommodate your application, simply write to us, we are able to offer you custom-made service or related questions.

Ningbo Vormag Electronics Co.,Ltd
Office address: 4F Nanyang Building, No. 218 Dieyuan Road,
315100 Ningbo, China

Tel: +86(0)574-88302657
E-mail: info@vormag.cn
Website: www.vormag.cn

