
RUBBER COATED NEODYMIUM POT MAGNET WITH SCREWED BRUSH, ROUND BASE

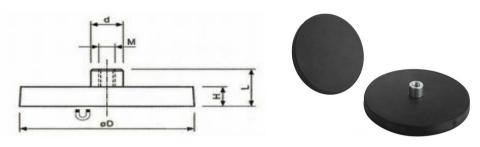

| No. | model code | D | Н | L | d | М | pull force | magnet type | coating |
|-----|------------|------|-----|------|----|---------|------------|----------------|---------|
| | | mm | mm | mm | mm | thread | Kgs | | |
| 1 | NP03-22 | 22 | 6 | 11.5 | 8 | M4 | 4.5 | NdFeB | rubber |
| 2 | NP03-43 | 43 | 6 | 10.5 | 8 | M4 | 8.5 | NdFeB | rubber |
| 3 | NP03-66 | 66 | 8.5 | 15 | 10 | M5 | 18 | NdFeB | rubber |
| 4 | NP03-66A | 66 | 8.5 | 15 | 10 | M6 | 18 | NdFeB | rubber |
| 5 | NP03-66B | 66 | 8.5 | 15 | 10 | M5 | 18 | NdFeB | rubber |
| 6 | NP03-88 | 88 | 8.2 | 17 | 12 | M6 | 42 | NdFeB | rubber |
| 7 | NP03-88A | 88 | 8.5 | 17 | 12 | M8 | 42 | NdFeB | rubber |
| 8 | NP03-89.3 | 89.3 | 8.5 | 8.5 | 12 | #1/4-20 | 45 | NdFeB | rubber |

The rubber-coated mounting magnets with screwed brush offer magnetic bases for waterproof magnetic ceiling hooks and rustproof holding magnets for outdoor use. All the internal thread rubber-coated mounting magnets are made withneodymium material, which produces the strongest strength.

There are still many other variables in terms of the size, thread types, thread height, surface treatment, pull force requirements etc. If you didn't find the parts will accommodate your application, simply write to us, we are able to offer you custom-made service or related questions.

Ningbo Vormag Electronics Co.,Ltd Office address: 4F Nanyang Building, No. 218 Dieyuan Road, 315100 Ningbo, China Tel: +86(0)574-88302657 E-mail: info@vormag.cn Website: www.vormag.cn

