
RECTANGULAR RUBBER COATED NEODYMIUM MAGNET WITH INTERNAL THREAD

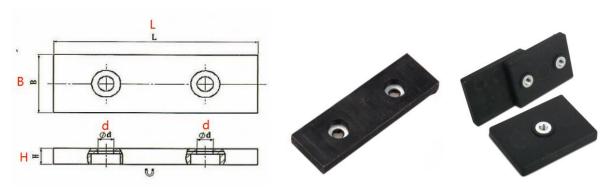

| No. | model code | L | В | Н | d | Pull Force | Magnet type | coating |
|-----|------------|-----|----|----|-----|------------|----------------|---------|
| | | mm | mm | mm | mm | KGs | | |
| 1 | NP07-32 | 32 | 32 | 6 | 5.5 | 6 | NdFeB | rubber |
| 2 | NP07-52 | 52 | 32 | 6 | 5.5 | 7.5 | NdFeB | rubber |
| 3 | NP07-70 | 70 | 22 | 6 | 5.5 | 5 | NdFeB | rubber |
| 4 | NP07-70A | 70 | 22 | 6 | 5.5 | 7 | NdFeB | rubber |
| 5 | NP07-108 | 108 | 52 | 7 | 5.5 | 18 | NdFeB | rubber |

The rubber-coated mounting magnets with screwed brush offer magnetic bases for water proof magnetic ceiling hooks and rustproof holding magnets for outdoor use. All the internal thread rubber-coated mounting magnets are made with neodymium material, which produces the strongest strength.

If you didn't find the parts will accommodate your application, simply write to us, we are able to offer you custom-made service or related questions.

Ningbo Vormag Electronics Co.,Ltd Office address: 4F Nanyang Building, No. 218 Dieyuan Road, 315100 Ningbo, China

E-mail: info@vormag.cn Website: www.vormag.cn

Tel: +86(0)574-88302657

